


**IEC
LOCK**



Guards against accidental disconnection of computers, servers and most electrical appliances.

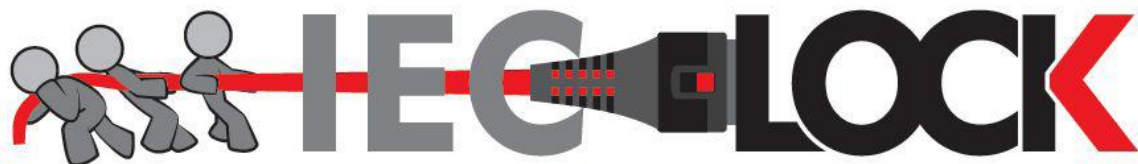

‘Unique’ Female C13 connector



Suitable for use with ‘ANY STANDARD’ IEC inlet

- **Protects appliances that are vulnerable to vibration**
- **Connector cannot be accidentally pulled or vibrated out of the inlet**

Data Centers



Outside Broadcasting



Medical



Military




Maritime

How it works!

IEC
LOCK

- Push the connector into the standard IEC inlet and it is locked in position
- Connector **CANNOT** be accidentally pulled or vibrated out of the inlet
- Slide back the 'red' tab to release and remove connector from inlet

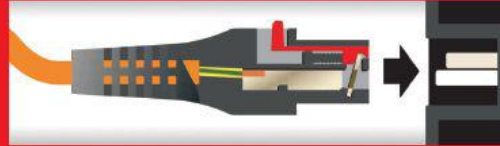

IEC Lock (C13)

Technical Information

Cable Assemblies

- IEC LOCK (C13) to UK Non-rewireable Plug
- IEC LOCK (C13) to European Right Angled Schuko Plug
- IEC LOCK (C13) to European (C14) IEC Plug
- IEC LOCK (C13) to NEMA 5-15P (USA)
- IEC LOCK (C13) to Australian 3 Pin Plug
- IEC LOCK (C13) to Stripped Ends

Cable Lengths

300mm up to any length. Various cables lengths and assemblies are retained as stock items with further combinations being available for special order. Call our Sales Office for more information.

Cable Size

3 x 1.00mm² H05 VV-F,
3 x 16, 3 x 18awg SVT / SJT
Black, Orange, Blue, Grey, White

Test Information

Test Body: KEMA, UL, SAA
Test Standard: IEC/EN 60320-1

Patent Information

Patents: U.K. Patent
No. GB2383202B
International Patent application
No. PCT/GB02/05714

